


dared The Purity of Sound



HPA-55L
FOR YOUR EARS ONLY



HPA-55L Portable Headphone Amplifier

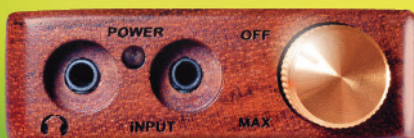

- Max. Power Output :
2x300mW (Single-end Output loading: 16 Ω)
2x1000mW(Balanced Output loading: 16 Ω)
- Frequency Response : 10Hz-30kHz (± 0.5 dB)
- S/N Ratio : 98dB
- Max. Power Consumption : 3500mW
- Working hours of Batteries (Fully Charged) : Over 12 Hours
- Input port : 3.5mm phono jack
- Input impedance : 47K Ω
- Headphone Output port : 3.5mm single-end phono jack output x 1, 3.5mm Balanced phono jack output x1
- Output internal resistance : 5 Ω (Single-end) , 10 Ω (Balanced)
- Damping Factor : 7
- Q Factor : 0.75
- Max. Signal input level : 3V (RMS)
- DC charging Power Supply : DC 12V 500ma
- Batteries rechargeable life time : over 500 times